

TW 6

Metal Dome Tweeter

MARKAUDIO



TW6: The DIY Builder's Choice for High-Fidelity Sound


For passionate DIY speaker builders, the Markaudio TW6 is the perfect tweeter to bring your custom projects to life with low distortion levels and crisp, detailed highs.

Featuring a custom-made polymer frame with a small built-in waveguide, no disruptive phase-shield, and a voice coil damped with light ferrofluid to improve cooling and increase power-handling, the high-efficiency TW6 is a versatile tweeter that makes an excellent match for Markaudio's MA200, CHR-120, Alpair 12P, and CHN-110, as well as general purpose use. With an extended frequency response reaching 30 KHz, this tweeter ensures sparkling treble and natural clarity in multi-driver systems.

The TW6 frame is custom designed to look professional and pleasing. The inbuilt texture finish and fully recessed mountings give this driver a high-end appearance.

Whether you are building from scratch or upgrading an existing setup, the TW6 offers a versatile solution for achieving high-resolution sound.

Unleash your creativity. Build with the TW6, and experience pure acoustic precision.

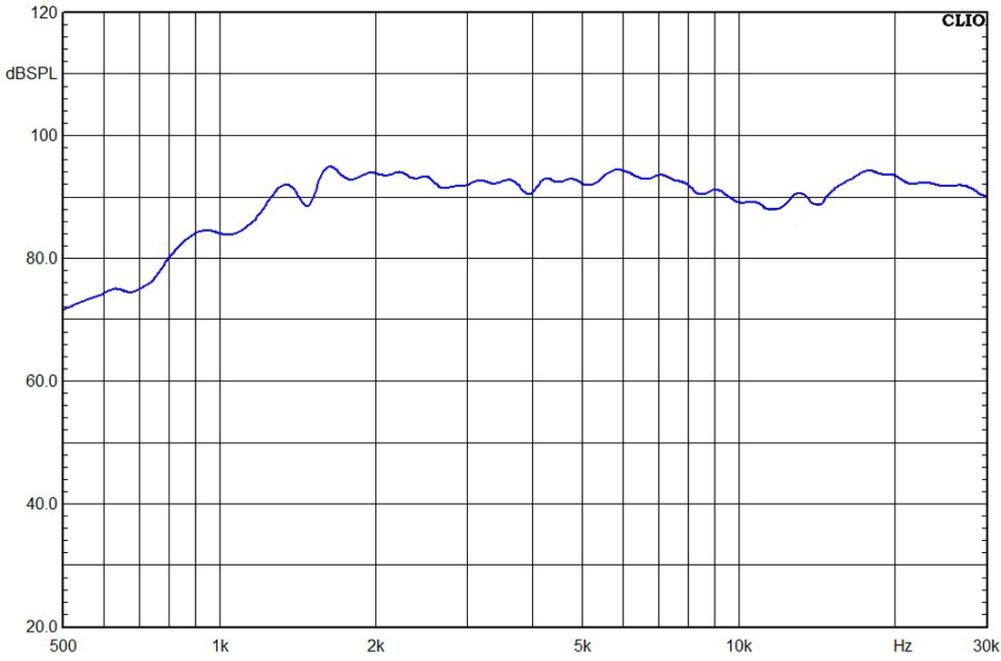

- FS. 1.7K Hz
- Nom. Imp. 4 ohm
- SD 7.1 cm²
- DCR 3.2 ohm
- SPL 92dB(1m/1w)
- Power 15 watts (Nom)
- Power 30 watts (Max)
- Freq Range 2.5K - 30K Hz
- Coil Dia 25mm
- Diaphragm Alu
- X-max (P-P) 0.3mm
- Weight 55.4 grams

The frequency response above shows the measured anechoic axial sound pressure level using a standard IEC test baffle. Input 1M/1W. Impedance is measured in free space with a 1V input signal.

